



HIGH-EFFICIENT HARDMOUNT INDUSTRIAL WASHER-EXTRACTORS

IA180

18KG

IA240

24KG

IA280


28KG

FEATURES


- Rigid mounted, normal spin, 100G factor
- Stainless steel top and front panel, black side panels
- Stainless steel drum and tub
- Aries - easy to use microprocessor
- Patented soap hopper
- High capacity water inlets (IA280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

OPTIONS


- 200G factor execution
- Aries Elite - Fully programmable
- Coin operated timer
- Stainless steel side panels
- Liquid soap connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- 3rd water inlet
- High capacity water inlets (IA180, IA240)
- ECO version : lower kW rating on request
- Top panel without opening for soap hopper (for machines connected to automatic liquid soap dosing)

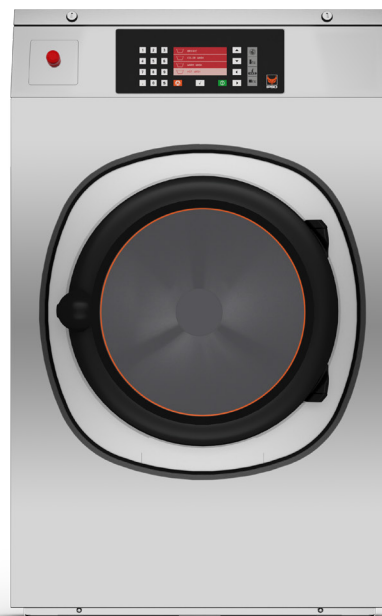

SmartWAVE automatically determines the absorption ability of the load at the start of the cycle, resulting in optimized water levels throughout the cycle.



ERGONOMICAL
CONSTRUCTION



LARGE DOOR
OPENING



LOW WATER
CONSUMPTION



LOW ENERGY
CONSUMPTION

THE SMART LAUNDRY PARTNER

	IA180	IA240	IA280
INNERDRUM			
CAPACITY 1:10 (KG)	18	24	28
CAPACITY 1:9 (KG)	20	27	31
VOLUME (L)	180	240	280
DIAMETER (MM)	750	750	750
DRUM SPEED			
WASH (RPM)	42	42	42
EXTRACTION (RPM)	490 (100G) - 690 (200G)	490 (100G) - 690 (200G)	490 (100G) - 690 (200G)
G-FACTOR	100 (optional 200)	100 (optional 200)	100 (optional 200)
HEATING			
ELECTRICITY (KW) very low-low-std-higher-special 1 -2-3	----std 12 - higher 18-----	----std 18-----	-----std 21,9-----
STEAM (BAR)	1 - 8	1 - 8	1 - 8
HOT WATER (°C)	90	90	90
SOUND PRESSURE LEVEL (DB) (A)	< 65	< 65	< 65
WATER VALVES CONNECTION (BSP)	3/4"	3/4"	3/4"
WATER PRESSURE (KPA)	100-800	100-800	100-800
REC. WATER PRESSURE (KPA)	300-500	300-500	300-500
WATER INLET (L/MIN)	20	20	20
DRAIN VALVE OUTER (MM)	Ø 76	Ø 76	Ø 76
Flow Amount With Drain Valve (L/MIN)	210	210	210
STEAM VALVE CONNECTION (BSP)	1/2"	1/2"	1/2"
STEAM PRESSURE (KPA)	100-800	100-800	100-800
TRANSPORT DATA			
GROSS WEIGHT (KG)	270 (335 with 200G)	290 (355 with 200G)	305 (385 with 200G)
NET WEIGHT (KG)	255 (315 with 200G)	275 (330 with 200G)	290 (335 with 200G)
PACKING DIMENSIONS HXWxD (MM)	1550 x 925 x 970	1550 x 925 x 1130	1550 x 925 x 1190

